

StreamCenter™

Multistream Video Decoder for PixelNet®



The Massively Expandable Solution for HD Decoding and Display

StreamCenter™ is the most fully featured multistream decoder anywhere. For applications ranging from security monitoring to traffic management to military command and control, and any organization which relies on video streams for situational awareness, Jupiter's StreamCenter is the answer for high performance decoding of multiple streams.

StreamCenter supports both high definition and standard definition IP streams from cameras, encoders, NVRs, and PCs.

Using Jupiter scaling and communication technology, large numbers of streamed sources can be displayed at full frame rate, simultaneously, with digital precision.

StreamCenter™ Is Powerful and Flexible

Each StreamCenter chassis can decode up to 32 channels of HD video. For projects with large numbers of sources, multiple StreamCenters can be put to work decoding hundreds or even thousands of streams simultaneously.

StreamCenter decodes most major streaming formats, including H.264, MPEG-2, MPEG-4, and MJPEG at resolutions up to 1920x1080.

Designed for PixelNet®

StreamCenter supports Jupiter Systems' PixelNet Distributed Display Wall System. PixelNet is a high bandwidth non-blocking switched network of input and output nodes, adopting Gigabit Ethernet for use with high resolution, real time video.

All of this power and flexibility is managed by Jupiter's PixelNet Domain Control software, which provides an intuitive, object-oriented, drag-and-drop interface to control and manage multiple inputs, outputs and display walls.

PixelNet is all about scalability. A system can be expanded by adding more input nodes or StreamCenters to attach additional sources, or more output nodes to attach additional displays, and connecting them to the PixelNet Switch with common CAT6 cables. PixelNet makes creating complex topologies of inputs, outputs and switches simple, cost effective, and future proof.


StreamCenter matches PixelNet's scalability with its own. Each StreamCenter chassis connects to switches in the PixelNet domain via 10G ports. Combining PixelNet and StreamCenter allows the creation of very large display walls, or multiple display walls, capable of monitoring thousands of high definition streaming sources.



StreamCenter™

Multistream Video Decoder for PixelNet®

System Architecture	Gen 2 PCI Express chassis with 11 slots, hot-swappable fans, and redundant hot-swappable power supplies Minimum configuration is 2 Jupiter Quad HD Decoder Cards™ and 1 NIC; maximum is 8 Jupiter Quad HD Decoder Cards and 3 NICs
Quad HD Decoder Card™	Each card features 4 independent decoders capable of handling multiple formats and protocols, adapting automatically to specific stream types
Network Connectivity	Single Gigabit Ethernet connection for each Quad HD Decoder Card, 10G SFP+ connection for each NIC
Streaming Video Formats	H.264: Baseline & Main Profile, MPEG-2 & MPEG-4: Main & High Profile, MJPEG, at resolutions up to 1080p30
Transport and Protocols	Program, elementary, and transport streams; RTP, RTCP, RTSP, SAP, TCP, and UDP protocols; Unicast and multicast
Dimensions	
H x W x D	7" x 17" x 18" (17.8 cm x 43.2 cm x 45.8 cm)
Weight	System Weight: 31 lbs. (14.1 kg), Shipping Weight: 40 lbs. (18.2 kg)
Operating Environment	
Temperature	Operating: 32°F – 104°F (0°C – 40°C), Non-Operating: 14°F – 150°F (-10°C – 6°C)
Humidity	10-90%, non-condensing
Altitude	Up to 10,000 feet (3,048m)
Electrical Requirements	
Input voltage	100-240 VAC, auto-ranging power supply
Line frequency	50-60Hz
Power consumption	600 watts, maximum
Regulatory	
United States	UL 60950 Listed, FCC Class A
Canada	cUL CSA C22.2, No. 80950, ICES-003
International	CE Mark, CB Certificate and Mark, IEC 60950, CCC Mark, CISPR 22, VCCI V-3, BSMI CNS 13438

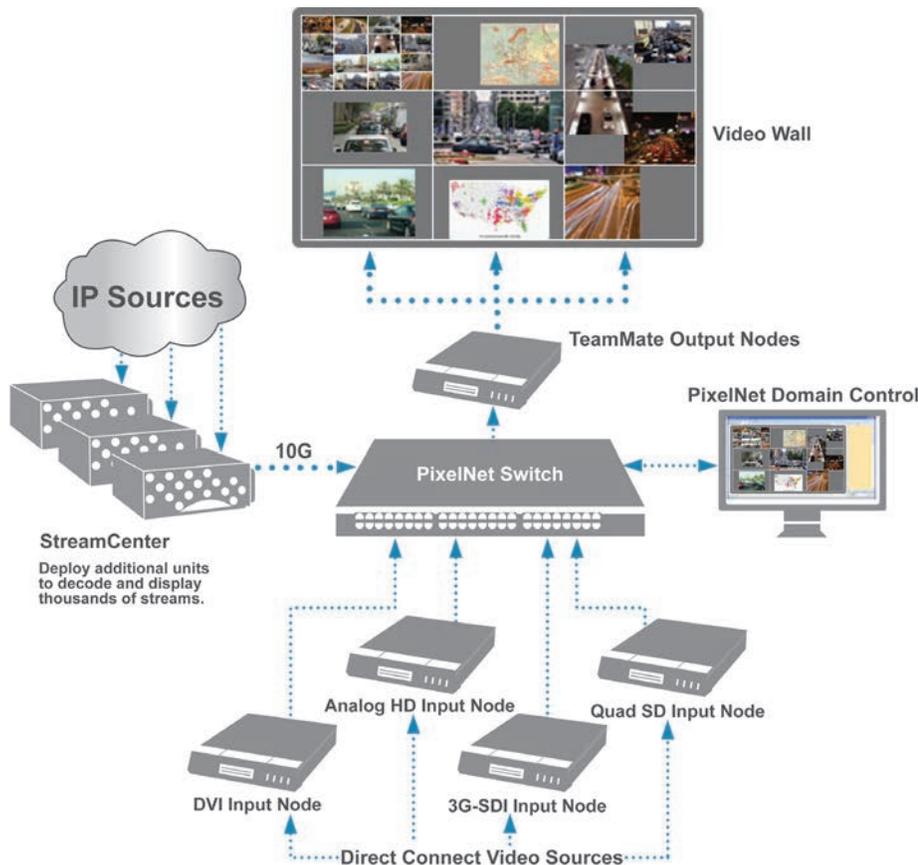

- Supports SD and HD IP video inputs
- Decodes up to 32 channels of HD video per chassis
- Install multiple StreamCenters to handle thousands of streams
- Decodes H.264, MPEG-2, MPEG-4, MJPEG
- Supports most popular IP cameras and encoders
- Output resolutions up to 1920x1080
- Configurable decoder cards and NICs
- Hot-swappable fans and redundant hot-swappable power supplies
- Connects directly to PixelNet Switch via 10G SFP+ link
- System monitoring through GUI provides real-time status
- Easy to configure and operate through PixelNet Domain Control GUI
- Robust APIs provide programming flexibility and external control



Jupiter Systems
31015 Huntwood Avenue
Hayward, California
94544-7007 USA
+1 510 675 1000 tel
+1 510 675 1001 fax
www.jupiter.com

Jupiter Systems, the Jupiter logo, and PixelNet are registered trademarks of Jupiter Systems. StreamCenter and PixelNet Domain Control are trademarks of Jupiter Systems. All other trademarks belong to their respective owners. Specifications are subject to change without notice.

Copyright ©2013 Jupiter Systems.

REV.201-306